


DIMENSIONS & MOUNTING



SHOPS, RECEPTIONS, SHOWROOMS, GALLERIES, MUSEUMS

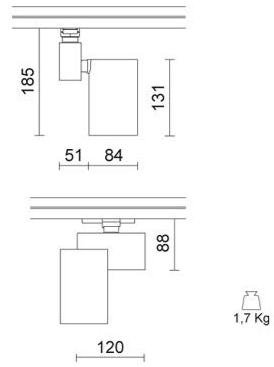

LED

up to 3000 lm

up to 94 lm/W

80 Ra



Mounting	Suspended or ceiling surfaced lighting track system (suitable for GLOBAL Trac system)
Optical system	Reflector
Light distribution	Direct
Driver	Electronic control gear
Materials	Body: Die-Cast Aluminium
Surface finish	Polyester Painted
Service lifetime	50 000 hours, L70
Ambient temperature	0°C / +35°C
EEC	A++ / A+ / A

PERFORMANCE

A whole lot of functionality packed into a small space. Fully adjustable, with exceptional reflector efficiency

Type	lumen output (at T _a = 25 °C)	power consumption	color rendering index	correlated colour temperature	optic
	(lm)	(W)	CRI (Ra)	CCT (K)	
PERFORMANCE	2000	19	80	3000	38° (20°/60°/70° available on demand)
PERFORMANCE	2000	19	80	4000	38° (20°/60°/70° available on demand)
PERFORMANCE	3000	33	80	3000	38° (20°/60°/70° available on demand)
PERFORMANCE	3000	33	80	4000	38° (20°/60°/70° available on demand)

STANDARD



Shoplight

Expert providers of lighting solutions for retailers