

# Retail



Grey



>80



3000K  
4000K



Max 88W




Max 11650lm

Dimensions  
(W x H x L)

100 x 100mm  
S: 660mm  
M: 1270mm  
L: 1570mm  
XL: 1840mm



S: 1.30kg  
M: 2.30kg  
L: 2.8kg  
XL: 3.3kg

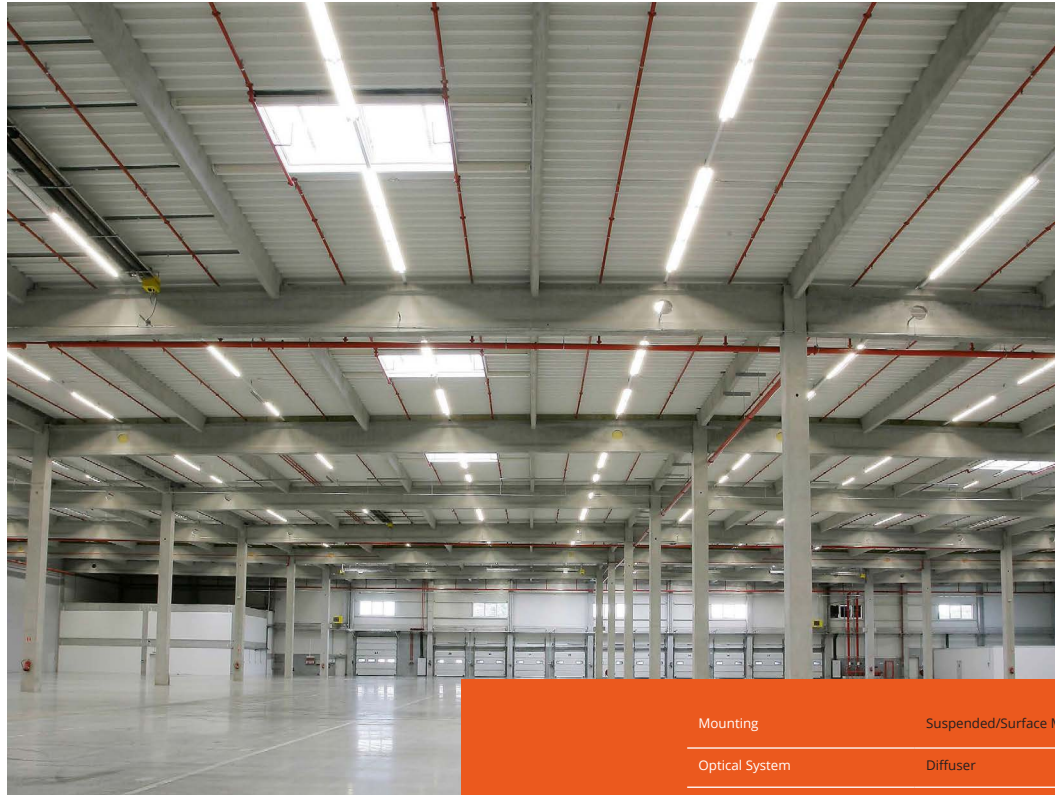

Mounting	Suspended/Surface Mounted
Optical System	Diffuser
Light Distribution	Direct
Driver	Electronic Control Gear (Fix/DALI)
Materials	Housing: Grey Injected Polycarbonate Diffuser: Transparent Injected Polycarbonate Clips: Polycarbonate
Surface Finish	Painted
Service Lifetime	50,000 Hours / L80 B10 @ 30°C
Ambient Temperature	-20°C / +30°C
EEC	A++/A+/A

## TIMBERWOLF

This industrial classic is as simple as it is reliable. High efficacies and various electrical options make this hard working LED luminaire ideal for any area of application where visual comfort and performance is needed without compromise.



**Shoplight**

Expert providers of lighting solutions for retailers