

Retail



White
Grey
Black

(Ra)

>80
>90



2500K
2700K
3000K
3500K
4000K
5000K



15°
30°
45°




Max 2x28W




Max
2x3656lm

Dimensions
(L x W x H)

285 x 205 x
210mm



Glass
Opal
Frosted

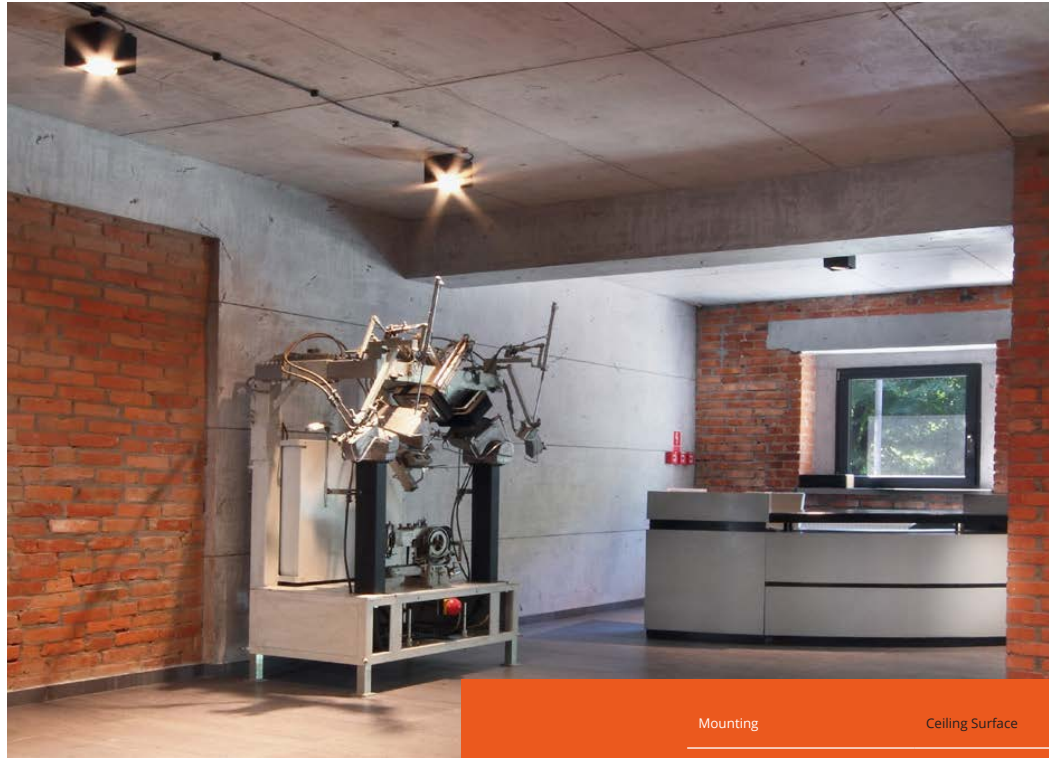

Mounting	Ceiling Surface
Optical System	Reflector
Light Distribution	Direct
Driver	Electronic Control Gear
Materials	Housing: Aluminium
Surface Finish	Painted
Service Lifetime	50,000 Hours
Ambient Temperature	0°C / +25°C
EEC	A++A+/A

CHARGER SM II

The great benefits of the Charger family can also be had in surface mounted variant with the addition of the Charger SM II. With high lumen packages and the same extensive choice of colour temperatures, the Charger SM II delivers all of the benefits of the recessed variants for those stores without false ceilings.



Shoplight

Expert providers of lighting solutions for retailers