


DIMENSIONS & MOUNTING



SHOPS, RECEPTIONS, SHOWROOMS, GALLERIES, MUSEUMS

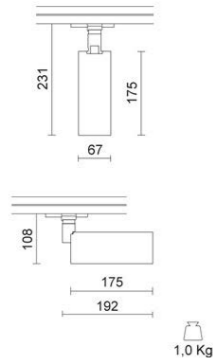

LED

up to 3200 lm

up to 100 lm/W

80 Ra



Mounting	Suspended or ceiling surfaced lighting track system (suitable for GLOBAL Trac system)
Optical system	Reflector
Light distribution	Direct
Driver	Electronic control gear
Materials	Housing: aluminium + sheet steel
Surface finish	Polyester Painted
Service lifetime	50 000 hours, L70
Ambient temperature	0°C / +35°C
EEC	A++ / A+ / A

COMPACT PERFORMANCE

A whole lot of functionality packed into a small space. Fully adjustable, with exceptional reflector efficiency

Type	lumen output (at T _a = 25 °C)	power consumption	color rendering index	correlated colour temperature	optic
	(lm)	(W)	CRI (Ra)	CCT (K)	
COMPACT PERFORMANCE	3100	26	80	3000	26° (45°/65° available on demand)
COMPACT PERFORMANCE	3200	26	80	4000	26° (45°/65° available on demand)

STANDARD



Shoplight

Expert providers of lighting solutions for retailers