




## Dimensions

Available length; 410, 610, 810, 1010, 1210, 1410, 1610, 1810, 2010

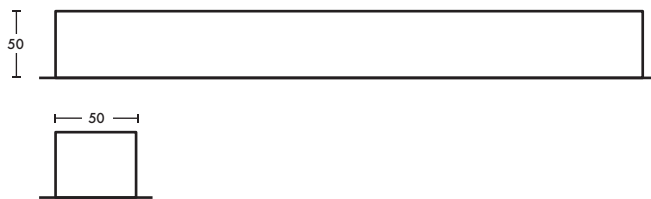

measurements in mm



Colours also available



Any RAL colour (special request)



Vinyl wrap available



IP20



CE



DALI & Phase Cut Dimming Available



RoHS

## Product details

Other wattages available, please contact us for details.

System Power	16W (610mm module)			33W (1410mm module)			45W (2010mm module)		
CCT	3000K	3500K	4000K	3000K	3500K	4000K	3000K	3500K	4000K
Luminaire Lumens at CRI 85*	1008	1023	1053	2351	2386	2457	3359	3409	3510
Luminaire Lumens at CRI 90+*	827	842	872	1930	1965	2035	2757	2807	2907
LED Efficacy @ CRI 85	63 lm/W	63.9 lm/W	65.8 lm/W	71.3 lm/W	72.3 lm/W	74.4 lm/W	74.6 lm/W	75.8 lm/W	78 lm/W
LED Efficacy @ CRI 90+	51.7 lm/W	52.6 lm/W	54.5 lm/W	58.5 lm/W	59.5 lm/W	61.7 lm/W	61.3 lm/W	62.4 lm/W	64.6 lm/W
Optics	Prismatic, microprismatic & opal diffusers; Parabolic louvre, micro louvre								

\*Lumen values may vary by +/- 10%

For more information visit [shoplight.lighting](https://shoplight.lighting)