




Dimensions

Available length; 610, 910, 1210, 1510, 1810, 2110, 2410

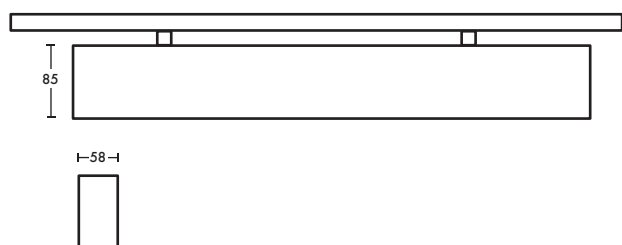

measurements in mm



Colours also available



Any RAL colour (special request)



Vinyl wrap available



IP20



CE



DALI & Phase Cut Dimming Available



RoHS

Product details

Other wattages available, please contact us for details.

System Power	31W (916mm module)			51W (1516mm module)			41W (2116mm module)		
CCT	3000K	3500K	4000K	3000K	3500K	4000K	3000K	3500K	4000K
Luminaire Lumens at CRI 85*	2063	2094	2156	3438	3490	3593	2750	2792	2875
Luminaire Lumens at CRI 90+*	1694	1724	1786	2824	2873	2977	2259	2299	2381
LED Efficacy @ CRI 85	66.5 lm/W	67.5 lm/W	69.5 lm/W	67.4lm/W	68.4 lm/W	70.5 lm/W	67.1 lm/W	68.1 lm/W	70.1 lm/W
LED Efficacy @ CRI 90+	54.7 lm/W	55.6 lm/W	57.6 lm/W	55.4 lm/W	56.3 lm/W	58.4 lm/W	55.1 lm/W	56.1 lm/W	58.1 lm/W
Optics	Prismatic, microprismatic & opal diffusers; Parabolic louvre, micro louvre								

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting