


Dimensions

Available length; 610, 910, 1210, 1510, 1810, 2110, 2410



measurements in mm

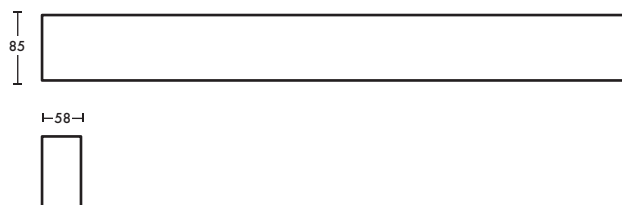

Colours also available



Any RAL colour (special request)



Vinyl wrap available



IP20



CE



DALI & Phase Cut Dimming Available



RoHS

Product details

Other wattages available, please contact us for details.

System Power	24W (610mm module)			41W (1210mm module)			84W (2410mm module)		
CCT	3000K	3500K	4000K	3000K	3500K	4000K	3000K	3500K	4000K
Luminaire Lumens at CRI 85*	1375	1396	1437	2750	2792	2875	5501	5584	5749
Luminaire Lumens at CRI 90+*	1129	1149	1191	2259	2299	2381	4518	4597	4763
LED Efficacy @ CRI 85	62.5 lm/W	63.4 lm/W	65.3 lm/W	67.1 lm/W	68.1 lm/W	70.1 lm/W	65.5 lm/W	66.5 lm/W	68.4 lm/W
LED Efficacy @ CRI 90+	51.3 lm/W	52.2 lm/W	54.1 lm/W	55.1 lm/W	56.1 lm/W	58.1 lm/W	53.8 lm/W	54.7 lm/W	56.7 lm/W
Optics	Prismatic, microprismatic & opal diffusers; Parabolic louvre, micro louvre								

*Lumen values may vary by +/- 10%