




Dimensions



measurements in mm

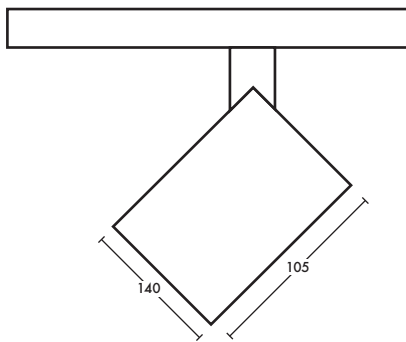


Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Phase Cut Dimming Available



IP20







CE



RoHS

Product details

Other wattages available, please contact us for details.

System Power	9.5W			18.5W			38.5W (MAX)					
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K			
Luminaire Lumens at CRI 85*	1200	1250	1300	2300	2400	2500	4600	4700	5000			
Luminaire Lumens at CRI 90+*	1000	1050	1120	1900	2000	2150	3850	4100	4400			
LED Efficacy @ CRI 85	126 lm/W	132 lm/W	137 lm/W	124 lm/W	130 lm/W	135 lm/W	119 lm/W	129 lm/W	135 lm/W			
LED Efficacy @ CRI 90+	105 lm/W	111 lm/W	118 lm/W	102 lm/W	108 lm/W	116 lm/W	100 lm/W	106 lm/W	114 lm/W			
Optics	 15°			 30°			 45°			 60°		

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting