




Dimensions



measurements in mm

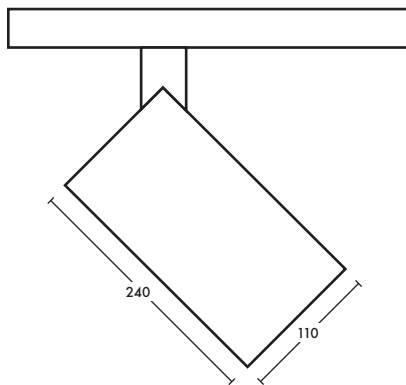


Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Phase Cut Dimming Available



IP20








CE



RoHS

Product details

Other wattages available, please contact us for details.

System Power	24W			29W			37W (MAX)		
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
Luminaire Lumens at CRI 85*	2516	2596	2728	2880	2972	2728	3564	3676	3864
Luminaire Lumens at CRI 90+*	2064	2196	2264	2364	2516	2592	2920	3112	3204
LED Efficacy @ CRI 85	104.8 lm/W	108.2 lm/W	113.7 lm/W	99.3 lm/W	102.5 lm/W	107.7 lm/W	96.3 lm/W	99.4 lm/W	104.4 lm/W
LED Efficacy @ CRI 90+	86 lm/W	91.5 lm/W	94.3 lm/W	81.5 lm/W	86.8 lm/W	89.4 lm/W	78.9 lm/W	84.1 lm/W	86.6 lm/W
Optics									
	15°	20°	30°	45°	60°				

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting