




Dimensions



measurements in mm

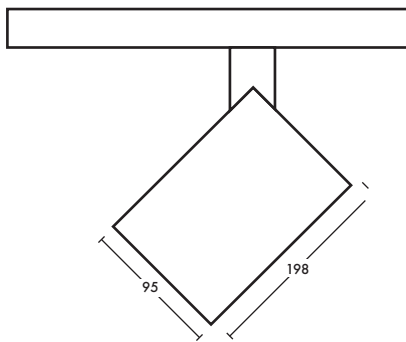


Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Phase Cut Dimming Available



IP20







CE



RoHS

Product details

Other wattages available, please contact us for details.

System Power	10W			14W			24W (MAX)					
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K			
Luminaire Lumens at CRI 85*	1116	1172	1208	1536	1584	1664	2516	2596	2728			
Luminaire Lumens at CRI 90+*	912	972	1004	1260	1340	1380	2064	2196	2264			
LED Efficacy @ CRI 85	111.6 lm/W	117.2 lm/W	120.8 lm/W	109.7 lm/W	113.1 lm/W	118.9 lm/W	104.8 lm/W	108.2 lm/W	113.7 lm/W			
LED Efficacy @ CRI 90+	912 lm/W	97.2 lm/W	100.4 lm/W	90 lm/W	95.7 lm/W	98.6 lm/W	86 lm/W	91.5 lm/W	94.3 lm/W			
Optics												
	15°			30°			40°			55°		

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting