




Dimensions



measurements in mm

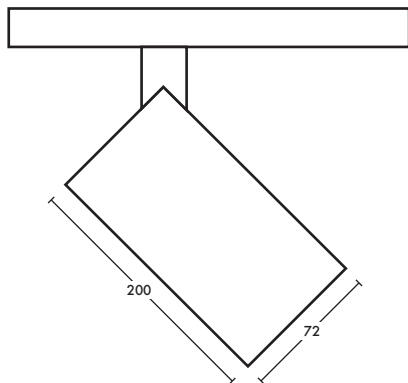


Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Phase Cut Dimming Available



IP20







CE



RoHS

Product details

Other wattages available, please contact us for details.

System Power	10W			14W			20W		
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
Luminaire Lumens at CRI 85*	1116	1172	1208	1536	1584	1664	2136	2204	2316
Luminaire Lumens at CRI 90+*	912	972	1004	1260	1340	1380	1752	1864	1920
LED Efficacy @ CRI 85	111.6 lm/W	117.2 lm/W	120.8 lm/W	109.7 lm/W	113.1 lm/W	118.9 lm/W	106.8 lm/W	110.2 lm/W	115.8 lm/W
LED Efficacy @ CRI 90+	912 lm/W	97.2 lm/W	100.4 lm/W	90 lm/W	95.7 lm/W	98.6 lm/W	87.6 lm/W	93.2 lm/W	96 lm/W
Optics									
	15°	24°				38°			60°

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting