




## Dimensions



measurements in mm

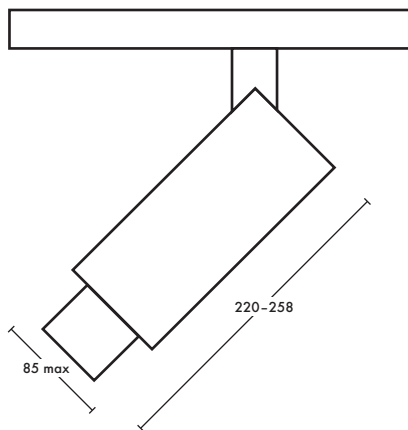

Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Phase Cut Dimming Available



IP20





CE



RoHS

## Product details

Other wattages available, please contact us for details.

System Power	14W			20W			24W		
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
Luminaire Lumens at CRI 85*	1536	1584	1664	2136	2204	2316	2516	2596	2728
Luminaire Lumens at CRI 90+*	1260	1340	1380	1752	1864	1920	2064	2196	2264
LED Efficacy @ CRI 85	109.7 lm/W	113.1 lm/W	118.9 lm/W	106.8 lm/W	110.2 lm/W	115.8 lm/W	104.8 lm/W	108.2 lm/W	113.7 lm/W
LED Efficacy @ CRI 90+	90 lm/W	95.7 lm/W	98.6 lm/W	87.6 lm/W	93.2 lm/W	96 lm/W	86 lm/W	91.5 lm/W	94.3 lm/W
Optics	(Adjustable) 6 - 60 degrees <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> <div style="text-align: center;">  <p>06°</p> </div> <div style="text-align: center;">  <p>60°</p> </div> </div>								

\*Lumen values may vary by +/- 10%

For more information visit [shoplight.lighting](http://shoplight.lighting)