


Dimensions

Available length; 415, 615, 815, 1015, 1215, 1415, 1615, 1815



measurements in mm

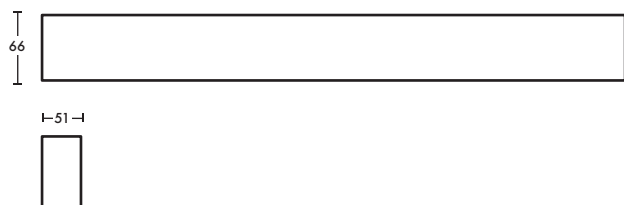

Colours also available



Any RAL colour (special request)



Vinyl wrap available



IP20



CE



DALI & Phase Cut Dimming Available



RoHS

Product details

Other wattages available, please contact us for details.

System Power	13W (415mm module)			29W (1215mm module)			47W (1815mm module)		
CCT	3000K	3500K	4000K	3000K	3500K	4000K	3000K	3500K	4000K
Luminaire Lumens at CRI 85*	395	401	413	1974	2004	2063	3553	3606	3712
Luminaire Lumens at CRI 90+*	324	330	342	1620	1650	1709	2916	2969	3075
LED Efficacy @ CRI 85	33 lm/W	33 lm/W	34 lm/W	68 lm/W	69 lm/W	71 lm/W	72 lm/W	78 lm/W	81 lm/W
LED Efficacy @ CRI 90+	27 lm/W	28 lm/W	29 lm/W	55 lm/W	56 lm/W	59 lm/W	63 lm/W	64 lm/W	67 lm/W
Optics	Prismatic, microprismatic & opal diffusers; Parabolic louvre, micro louvre								

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting