




## Dimensions



measurements in mm

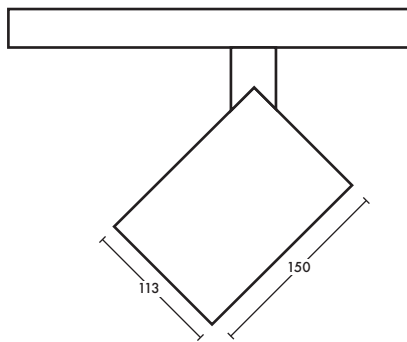


Colours also available




Any RAL colour (special request)



Vinyl wrap available



355°



90°



DALI & Casambi Dimming Available



IP20







CE



RoHS

## Product details

Other wattages available, please contact us for details.

System Power	14W			27W			38.5W (MAX)		
CCT	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
Luminaire Lumens at CRI 85*	1700	1750	1800	3150	3250	3350	4600	4700	5000
Luminaire Lumens at CRI 90+*	1400	1450	1550	2650	2730	2810	3850	4100	4400
LED Efficacy @ CRI 85	121 lm/W	125 lm/W	129 lm/W	117 lm/W	120 lm/W	124 lm/W	119 lm/W	129 lm/W	135 lm/W
LED Efficacy @ CRI 90+	100 lm/W	104 lm/W	111 lm/W	98 lm/W	101 lm/W	104 lm/W	100 lm/W	106 lm/W	114 lm/W
Optics									
	15°	30°	45°	60°					

\*Lumen values may vary by +/- 10%

For more information visit [shoplight.lighting](https://shoplight.lighting)