


Dimensions

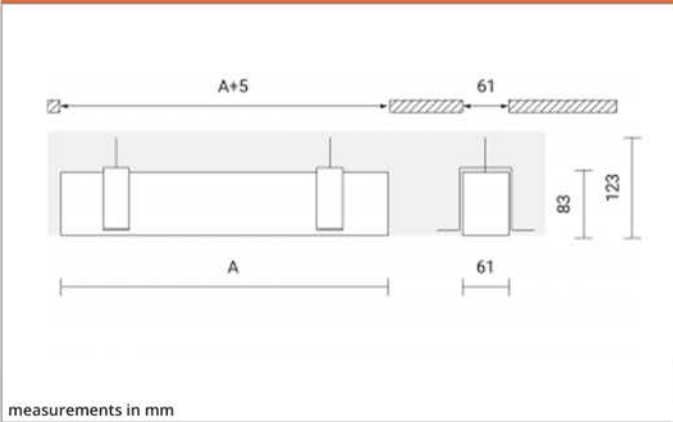

Product details

4000K also available.

	Length (mm)	System Power	Luminous Flux	CCT	CRI	Efficacy	Optic
SPC-SLT1401EM*	1401	25W	2800	3000K	>90	113lm/W	Opal/ Micro-Prismatic
SPC-SLT1681	1681	29W	3350	3000K	>90	117lm/W	Opal/ Micro-Prismatic
SPC-SLT1681EM*	1681	29W	3350	3000K	>90	117lm/W	Opal/ Micro-Prismatic
SPC-SLT1961	1961	35W	3650	3000K	>90	105lm/W	Opal/ Micro-Prismatic
SPC-SLT2241	2241	38W	4100	3000K	>90	108lm/W	Opal/ Micro-Prismatic
SPC-SLT2521	2521	43W	4500	3000K	>90	105lm/W	Opal/ Micro-Prismatic
SPC-SLT2521EM*	2521	43W	4300	3000K	>90	105lm/W	Opal/ Micro-Prismatic

* Integral 3 hour emergency conversion

For more information visit shoplight.lighting