

Linear

Sun L Track Mini



Track mounted linear luminaire complete with COB LED boards, lens distribution system and integral driver



Colours

As standard; white (RAL 9003), black (RAL 9005) and grey (RAL 9006)

Light Source

COB LED module
As standard; CRI900 in 3000 and 4000K

Lenses

30° | 55° | 90° | 105°
32° x 75°
Double Asymmetric
Asymmetric
Opal Diffuser

Materials

Housing made of aluminium

Driver

Electronic 50Hz On/off and DALI Dimming available

Installation

Mounted to Global 3-circuit lighting track (surface, suspended, recessed & control pulse)

Max Power

48w

Max Lumens

4800


Measurements

IP Rating

IP20

Diffuser

Opal

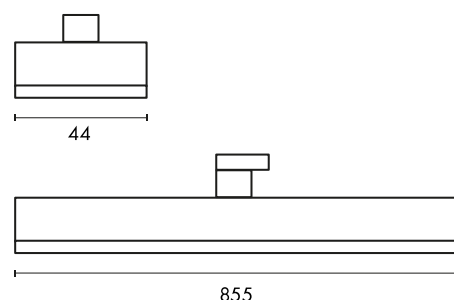

shoplight.lighting

+44 (0)1733 345265