



NATRIO

UK
CA

CE





Circu-light


220-240 Vac 50/60Hz 65W Max | Biopolymer



0.5m


Do not operate with
power supply connected.

1

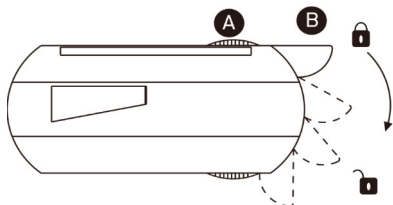


To mount the track adaptor into the track system, first check that the selector knob **A** is at OFF position and the adaptor lock **B** is disengaged.

2

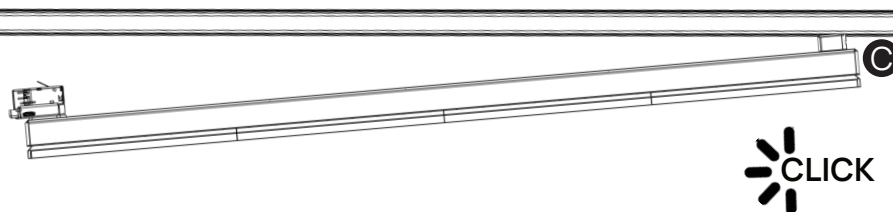


Insert track clip **C** end first whilst keeping luminaire at a shallow angle until you feel a click. Once retained within the track, proceed to step 3. Do not apply any force or rotate downwards once this is in place.

3

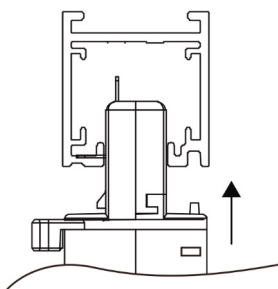


When installing the adaptor into the track, ensure that it is orientated correctly.

4

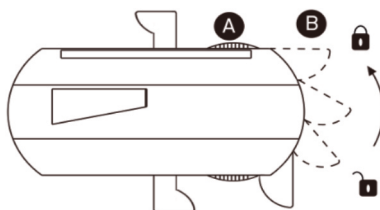


Rotate adaptor lock **B** clockwise 90° to connect the adaptor to the neutral circuit.

5

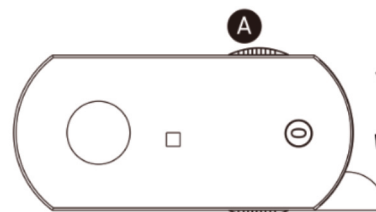


Rotate selector knob **A** to the position of desired circuit.

5a

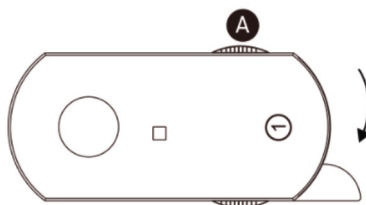


Circuit 1: Rotate the knob **A** 90° clockwise from the starting position OFF, to connect circuit 1.

5b

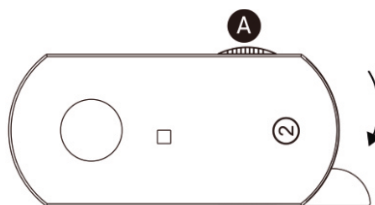

Circuit 2: Rotate the knob **A** 90° anti-clockwise from the starting position OFF, to connect circuit 2.

5c

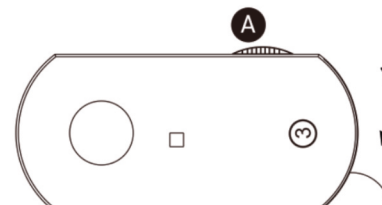

Circuit 3: Rotate the knob **A** 180° clockwise from the starting position OFF, to connect circuit 3.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting. Light source must have a minimum safe distance of 0.5m away from any object.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Consult with a qualified electrician should the installer be in any doubt.
5. Fitting is for indoor and ceiling use only.

MADE IN
BRITAIN®shoplight.lighting
+44 (0)1733 345265